

Panasonic

BUSINESS

PT-VZ580 Series

LCD Projectors

PT-VZ585N / PT-VZ580
PT-VW545N / PT-VW540
PT-VX615N / PT-VX610

PT-VZ470

BRIGHT IDEAS MAKE TEAMWORK EASY



Work as a Team

Whatever personal devices you use in spaces large or small, sharing on the big screen is now easier than ever. With wireless and single-cable solutions, Miracast, plug-and-share playback, and apps for smartphone and PC, collaborative presentations are tailored to you.

Note: Features mentioned in this section are supported only with PT-VZ585N/VW545N/VX615N.



Choose Your Connection

The high-powered PT-VZ585N/VW545N/VX615N works comfortably in permanent or portable applications. We include our long-reach DIGITAL LINK single-cable solution and dual-band Wi-Fi for easy content transmission from any device.



Multi-Platform Support

Wireless casting is available for most smart devices, from Mac and Windows® laptops to iOS and Android™ devices. Solutions include free apps and PC software, support for media dongles, plug-and-share application that enables wireless projection with USB memory device pairing with the projector, and more.



Advanced Miracast



WI-FI CERTIFIED™ Miracast works for both PC and Android, and has cut connection time by a third. Transmit audio, video, still images, and web media at full size. PIN protection and exclusive moderator modes enhance security.



Memory Viewer

What could be simpler than loading your images and video onto a USB memory stick and plugging it in? Do it with the PT-VZ585N/VW545N/VX615N. Wide format support and easy operation assure a professional presentation.

PT-VZ580 Series LCD Projectors

	PT-VZ585N	PT-VZ580	PT-VZ470	PT-VW545N	PT-VW540	PT-VX615N	PT-VX610
Resolution	WUXGA	WUXGA	WUXGA	WXGA	WXGA	XGA	XGA
Brightness	5,000 lm	5,000 lm	4,400 lm	5,500 lm	5,500 lm	5,500 lm	5,500 lm
Contrast	16,000:1	16,000:1	10,000:1	16,000:1	16,000:1	16,000:1	16,000:1
Wireless	✓	–	–	✓	–	✓	–
DIGITAL LINK	✓	–	–	✓	–	✓	–

Supreme Imaging Power


Brilliant High-Quality Pictures

WUXGA (1920 x 1200 pixel) resolution native to the PT-VZ585N/VZ580/VZ470 brings crisp Full HD to meeting spaces and classrooms for immersive viewing. With high brightness of up to 5,500 lm*, and an increased 16,000:1 contrast ratio*, your audience is treated to vivid colors, inky blacks, pure highlights, and clearly legible text reproduction.

6-Colors Adjustment and Color Correction Functions*

For the first time in a Panasonic portable, users can correct for slight color variations in the reproduction range of individual units set up for multi-projection. This is particularly useful for side-by-side configurations. Very large images can be seamlessly presented in auditoriums and boardrooms.

* Excluding PT-VZ470.

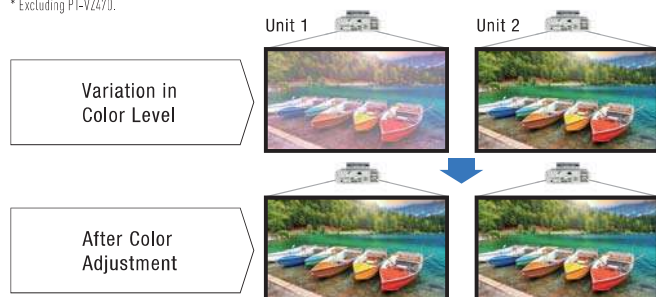


Efficient Low-Maintenance Design

PT-VZ580 Series projectors are extremely efficient to run. Air filter replacement cycle is a class-leading 7,000 hours, and the unit can be washed and reused twice*³ to minimize waste. Lamp life is also extended to 7,000 hours in ECO2 mode*⁴, meaning part refreshment can be performed together with filter maintenance to reduce downtime.

Daylight View Basic

Proprietary technology delivers sharp, comfortably viewed images by enhancing fine details, particularly in dark areas of the image, which are normally difficult to see in brightly lit rooms. A built-in sensor measures ambient light while Daylight View Basic adjusts halftone color and brightness to suit ambient illumination.

* With Daylight View Basic set to AUTO mode.

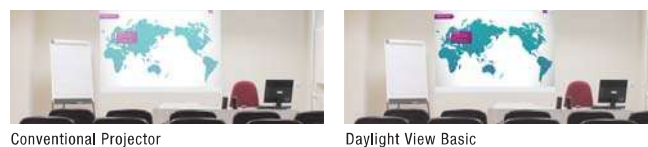

Quiet Operation

Technologies combine to keep noise levels down to just 29 dB*, so the sound of the cooling fan is hardly noticeable. This helps to keep attention focused on the presentation and quiet video scenes.

Flexible Wireless Collaboration

VZ585N VW545N VX615N

A Choice of Convenient Wireless Technologies


PT-VZ580 Series models with "N" designation include network capabilities to facilitate casting from iOS and Android™ devices, as well as from Windows® and Mac computers, with fast 3-step connection and wide media support.



Wi-Fi CERTIFIED™ Miracast


(PT-VZ585N/VW545N/VX615N Only)

Supported on Windows® PCs and Android™ devices, Miracast is a convenient low-latency protocol that provides high-bandwidth mirroring of video, stills, and web content with fast connection and a range of exclusive security features.



Full-screen Wireless Playback

Miracast supports stutter-free audio and Full HD video transmission from device to projector screen at 1:1.



Supports Multiple Display Modes

Easily control how content on your device is displayed on the big screen by selecting the appropriate mode.

Duplicate Mode

Mirror your device's screen on the projector screen.



Extend Mode

Use a projection surface as an extended PC screen.



Second Screen Only

Make the projector screen your PC screen.



Failsafe Transmission

To ensure confidential information isn't mistakenly transmitted to another display, users can enter a PIN code before casting media via Miracast.

Performance Improvements

Compared to Miracast on legacy PT-VZ570 Series projectors, connection time has been cut by about a third, and connectivity ratio increased by almost half.

Selectable Channels

Selectable 5 GHz/2.4 GHz channels are offered to provide a stable connection in rooms with network congestion or radio interference.

Moderator Mode and Cut-In Function

(PT-VZ585N/VW545N/VX615N Only)

Windows® Android™

Three modes allow the meeting chair to choose which participants' devices may display content or present content uninterrupted over Miracast. Interactive mode enables open chairing.


EXCLUSIVE

One device connected to prevent interruptions to solo presentations.



INTERACTIVE

Up to 10 users can project at any time for open collaboration.



MODERATED

Chairperson controls media display permission for up to 10 participants.



*1 For PT-VW545N/VW540/VX615N/VX615, PT-VZ585N/VZ580 features 5,000 lm and PT-VZ470 features 4,400 lm of brightness. *2 Excluding PT-VZ470. PT-VZ470 features 10,000:1 contrast ratio. *3 Filter replacement cycle is calculated based on time when projector's built-in sensor detects clogging and powers projector down. Please follow the procedures listed in the operating instructions when washing the filter with water. Replacement is recommended after filter has been washed and reused twice, or if filter is not sufficiently clean after washing. Filter replacement cycle is a guideline and may be reduced depending on environmental conditions. PT-VZ470's filter cannot be washed with water. *4 Maximum value with Lamp Mode set to ECO2. 5,000 hours in Normal Mode and 6,000 hours in ECO1 Mode. Lamp replacement cycle is a guideline and may be reduced depending on environmental conditions. *5 With Lamp Mode set to ECO2. 37 dB in Normal Mode and 35 dB in ECO1 Mode.

Universal Device Support with Panasonic Apps (PT-VZ585N/VW545N/VX615N Only)

Panasonic offers free applications for smartphone, tablet, and personal computer that enable fast 3-step connection to get your media on the big screen without fuss. Further, a new plug-and-share feature allows you to cast from PC without software or driver installation.



Plug and Share

Insert a USB memory device into the projector port. In less than a minute, configuration setting files and an application are copied. Plug the USB memory device into your PC, click the player icon, and transmit video and stills wirelessly to the projector—no software or network setup required.



Wireless Manager ME 6.4

Included Panasonic Wireless Manager software for Mac and Windows® PC lets you cast media from the screen of your computer via wireless LAN with a host of display options right at your fingertips.

Wireless Projector Apps

Dedicated apps for iOS and Android™ devices feature simple 3-step initial connection and support a variety of media and business document transmission. These apps also allow SSID and key information to be easily obtained via a projected QR Code, again saving on setup time.



Multi-Projector Mode*


Applications for PC, iOS, Android, and the optional Easy Wireless Stick** dongle support Multi-Projector Mode. This function enables media display from up to 16 different devices in split-screen configuration. You can also transmit content from one PC to up to eight projectors or displays.



* The number of windows that can be projected simultaneously varies depending on application used. Please refer to operating instructions for the application.

Single-Cable DIGITAL LINK Connection (PT-VZ585N/VW545N/VX615N Only)

DIGITAL LINK transmits uncompressed video, audio, and control commands through a single CAT 5e or higher STP cable for distances of up to 150 m (492 ft)*6 in Long Reach Mode. Optional DIGITAL LINK Switcher or Digital Interface Box reduces cabling and associated costs by connecting multiple source devices and transmitting signals to the projector via a single cable.

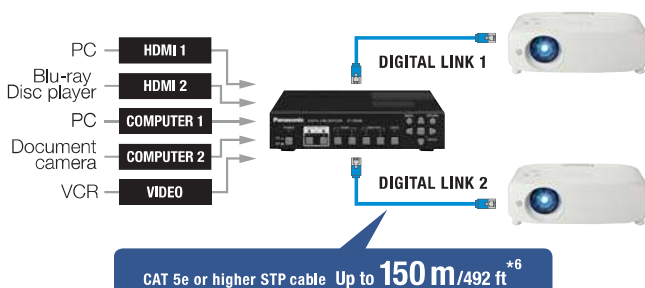

Memory Viewer (PT-VZ585N/VW545N/VX615N Only)

You don't need a computer to start presenting—just insert a USB memory device containing media and start projecting straight away. This includes Full HD video as well as still images. A simple Graphical User Interface (GUI) assures a smooth and stress-free presentation.



Supports IEEE802.1X Protocol (PT-VZ585N/VW545N/VX615N Only)

Only authenticated users can connect to the IEEE802.1X network (EAP** over LAN), preventing access by unauthorized users. PT-VZ580 Series projectors are compatible with IEEE802.1X protocol over wired or wireless LAN.

Easy Wireless Stick**8 (PT-VZ585N/VW545N/VX615N Only)

ET-UW100 (Option)


Supporting a full suite of features and eliminating the need for software installation, the Easy Wireless Stick dongle lets you plug and project from PC instantly. After one-time initial setup, projection is automatic, and the device will display images from up to 16 computers at once, and is compatible with Windows® 10.



Stress-free Installation

1.6x Zoom Lens and Lens Shift Function

Zoom lens allows you to project from wide range of distances from tabletops or ceiling. Use vertical lens shift to quickly adjust image position without distortion.

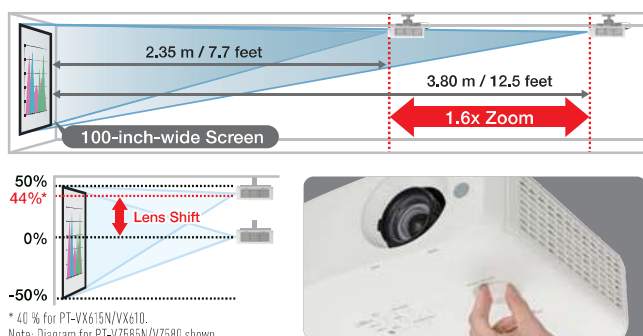

* 6 150 m (492 ft) transmission available only with ET-YFB200G DIGITAL LINK Switcher in Long Reach Mode for signals up to 1080p. ** EAP: Extensible Authentication Protocol. **8 Availability of the ET-UW100 Easy Wireless Stick varies depending on country. **9 Manual setting also available via setup menu.


Quick Lamp and Filter Replacement

To reduce hassle, the filter can be replaced via the side and the lamp from the top of the projector. There's no need to remove the unit from its ceiling mount for periodic maintenance.



Auto Screen Image Rotation


Images are automatically**9 rotated depending on installation orientation—upside down on the ceiling or set on a table—using a built-in angle sensor.

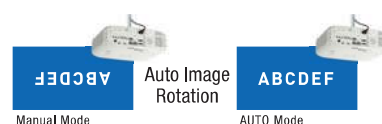

Horizontal, Vertical, and Corner Keystone Correction

Horizontal, vertical, and corner keystone correction adjusts the image shape for clear visibility when projecting off-axis or from an unusual angle.

Vertical, Horizontal, and Corner Keystone Correction

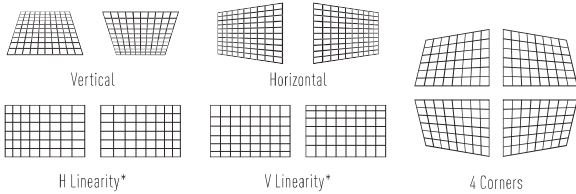

Curved Screen Correction



* Excluding PT-VZ470.



Images can be projected onto curved surfaces.

USB Display Function (PT-VZ585N/VW545N/VX615N Only)

Install Wireless Manager software on your PC, connect computer and projector with a USB cable*10, and Wireless Manager will automatically start up and output media (including audio) to the projector.

Additional Features


- DC OUT Terminal (PT-VZ580/VW540/VX610 Only)
- Direct Power Off
- Built-in 10 W Speaker
- ECO Management Function
- Whiteboard and Blackboard Mode
- Emulation Mode
- Crestron Connected™, AMX DD, and PJLink™ Compatible



- Easy Monitoring and Control Over LAN
- Auto Input Signal Search
- Early Warning Software Compatible (Option)
- Startup Logo Function
- Presentation Support Function
- Audio Standby Mode
- Digital Zoom Function
- Anti-theft Features
- Closed Captioning (NTSC)


Terminals

PT-VZ585N/VW545N/VX615N

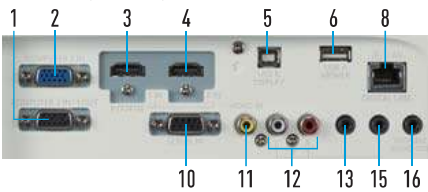


1. COMPUTER 2 IN / 1 OUT terminal
2. COMPUTER 1 IN terminal
3. HDMI 1 IN terminal
4. HDMI 2 IN terminal
5. USB B (DISPLAY) terminal (VZ585N/VW545N/VX615N only)
6. USB A (Viewer) terminal (VZ585N/VW545N/VX615N only)
7. DC OUT (5V 2A) terminal (VZ580/VW540/VX610 only)
8. DIGITAL LINK/LAN terminal (VZ585N/VW545N/VX615N only)

PT-VZ580/VW540/VX610

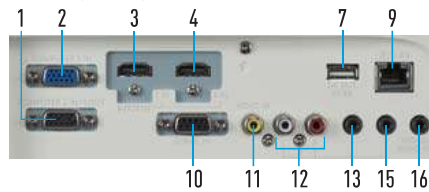

9. LAN terminal (VZ580/VW540/VX610 only)
10. SERIAL IN terminal
11. VIDEO IN terminal
12. AUDIO IN 3 terminal

PT-VZ470

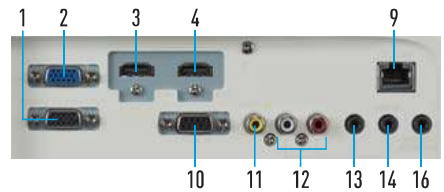

13. AUDIO IN 1 terminal
14. AUDIO IN 2 (MIC IN) terminal (PT-VZ470 only)
15. AUDIO IN 2 terminal (PT-VZ585N/VW545N/VX615N/VZ580/VW540/VX610 only)
16. VARIABLE AUDIO OUT terminal

Projection distance (Unit: meters [feet])

PT-VZ585N / VZ580 / VZ470

(16:10 aspect ratio; throw ratio 1.09–1.77:1, UD ratio 17:1)

Projection image size	Projection distance (L)		Height from the edge of screen to center of lens (H)	
	min. (wide)	max. (tele)		
Diagonal (inch)				
30"	0.68 [2.24]	1.12 [3.66]	0.02–0.20	0.07–0.66
40"	0.93 [3.04]	1.51 [4.95]	0.03–0.27	0.10–0.89
50"	1.16 [3.81]	1.89 [6.19]	0.04–0.34	0.12–1.10
60"	1.39 [4.58]	2.26 [7.43]	0.04–0.40	0.15–1.32
70"	1.64 [5.38]	2.66 [8.72]	0.05–0.47	0.17–1.55
80"	1.87 [6.14]	3.03 [9.95]	0.06–0.54	0.20–1.76
90"	2.12 [6.94]	3.43 [11.24]	0.07–0.61	0.22–1.99
100"	2.35 [7.71]	3.80 [12.48]	0.07–0.67	0.25–2.21
120"	2.83 [9.26]	4.57 [15.01]	0.09–0.81	0.29–2.65
150"	3.54 [11.62]	5.72 [18.77]	0.11–1.01	0.37–3.31
200"	4.73 [15.52]	7.64 [25.07]	0.15–1.35	0.49–4.42
250"	5.92 [19.43]	9.56 [31.36]	0.19–1.68	0.61–5.52
300"	7.11 [23.33]	11.48 [37.65]	0.22–2.02	0.74–6.63

PT-VW545N / VW540

(16:10 aspect ratio; throw ratio 1.08–1.76:1, UD ratio 17:1)

Projection image size	Projection distance (L)		Height from the edge of screen to center of lens (H)	
	min. (wide)	max. (tele)		
Diagonal (inch)				
30"	0.68 [2.22]	1.12 [3.66]	0.02–0.20	0.07–0.66
40"	0.92 [3.01]	1.51 [4.94]	0.03–0.27	0.10–0.89
50"	1.15 [3.77]	1.88 [6.18]	0.04–0.34	0.12–1.10
60"	1.38 [4.53]	2.26 [7.41]	0.04–0.40	0.15–1.32
70"	1.62 [5.33]	2.65 [8.69]	0.05–0.47	0.17–1.55
80"	1.86 [6.09]	3.03 [9.93]	0.06–0.54	0.20–1.76
90"	2.10 [6.88]	3.42 [11.21]	0.07–0.61	0.22–1.99
100"	2.33 [7.64]	3.79 [12.44]	0.07–0.67	0.25–2.21
120"	2.80 [9.20]	4.56 [14.96]	0.09–0.81	0.29–2.65
150"	3.51 [11.51]	5.70 [18.71]	0.11–1.01	0.37–3.31
200"	4.69 [15.38]	7.61 [24.98]	0.15–1.35	0.49–4.42
250"	5.87 [19.25]	9.52 [31.25]	0.19–1.68	0.61–5.52
300"	7.05 [23.12]	11.43 [37.51]	0.22–2.02	0.74–6.63

PT-VX615N / VX610

(4:3 aspect ratio; throw ratio 1.17–1.90:1, UD ratio 9:1)

Projection image size	Projection distance (L)		Height from the edge of screen to center of lens (H)	
	min. (wide)	max. (tele)		
Diagonal (inch)				
30"	0.69 [2.26]	1.14 [3.73]	0.05–0.23	0.15–0.75
40"	0.94 [3.07]	1.54 [5.04]	0.06–0.31	0.20–1.00
50"	1.17 [3.85]	1.92 [6.30]	0.08–0.38	0.25–1.25
60"	1.41 [4.62]	2.30 [7.55]	0.09–0.46	0.30–1.50
70"	1.65 [5.43]	2.70 [8.86]	0.11–0.53	0.35–1.75
80"	1.89 [6.20]	3.08 [10.12]	0.12–0.61	0.40–2.00
90"	2.14 [7.01]	3.48 [11.42]	0.14–0.69	0.45–2.25
100"	2.37 [7.79]	3.87 [12.68]	0.15–0.76	0.50–2.50
120"	2.86 [9.37]	4.65 [15.24]	0.18–0.92	0.60–3.00
150"	3.58 [11.73]	5.81 [19.07]	0.23–1.14	0.75–3.75
200"	4.78 [15.67]	7.76 [25.45]	0.30–1.52	1.00–5.00
250"	5.98 [19.61]	9.70 [31.84]	0.38–1.91	1.25–6.25
300"	7.18 [23.56]	11.65 [38.22]	0.46–2.29	1.50–7.50

Optional accessories

ET-PKL100H
Ceiling Mount Bracket for High Ceilings



ET-PKL100S
Ceiling Mount Bracket for Low Ceilings



ET-LAV400
Replacement Lamp Unit



ET-UW100*
Easy Wireless Stick



ET-PKV400B
Projector Mount Bracket



ET-RFV410
Replacement Filter Unit (For PT-VZ585N/VZ580/VW545N/VW540/VX615N/VX610)


ET-RFV400
Replacement Filter Unit (For PT-VZ470)



ET-SWA100 Series
Early Warning Software

ET-YFB200G
DIGITAL LINK Switcher


ET-YFB100G
Digital Interface Box



- The value for L (distance to screen) varies slightly depending on the zoom lens characteristics.
- At the shortest projection distance, the zoom lens characteristics may cause slight image distortion.

Dimensions

Unit: mm [inches]



*10 One-time USB driver installation is required upon initial USB cable connection. Supports Windows® PC only. Function is not available on Windows® 10.

Specifications															
Model		PT-VZ585N		PT-VZ580		PT-VZ470*1		PT-VW545N		PT-VW540		PT-VX615N		PT-VX610	
Power supply		AC 120 V, 50/60 Hz [North America], AC 110 V, 60 Hz [Taiwan], AC 100–240 V, 50/60 Hz [other countries]													
Power consumption		400 W [North America], 410 W [other countries]				372 W [North America], 378 W [other countries]		385 W [North America], 400 W [other countries]							
Standby power consumption	Standby Mode (Eco)*2	0,3 W [North America, Taiwan], 0,5 W [other countries]				0,2 W [North America], 0,4 W [other countries]		0,3 W [North America, Taiwan], 0,5 W [other countries]							
	Standby Mode (Normal)	14 W		8 W		8 W		14 W		8 W		14 W		8 W	
LCD panel	Panel size	0,64 inches (1,63 cm) [16:10 aspect ratio]												0,63 inches (1,60 cm) [4:3 aspect ratio]	
	Display method	Transparent LCD panel [x 3, R/G/B]													
	Pixels	2,304,000 [1920 × 1200] × 3, total of 6,912,000 pixels						1,024,000 [1280 × 800] × 3, total of 3,072,000 pixels				786,432 [1024 × 768] × 3, total of 2,359,296 pixels			
Lens		1,6x manual zoom (throw ratio: 1.09–1.77:1), manual focus F 1,60–2,12, f 15,30–24,64 mm				1,6x manual zoom (throw ratio: 1.08–1.76:1), manual focus F 1,60–1,90, f 15,31–24,64 mm				1,6x manual zoom (throw ratio: 1.17–1.90:1), manual focus F 1,60–1,90, f 15,31–24,64 mm					
Lamp		280 W UHM lamp × 1				270 W UHM lamp × 1		280 W UHM lamp × 1							
Screen size (diagonal)		30–300 inches													
Brightness*3		5,000 lm [input signal: PC, lamp power: Normal, picture mode: Dynamic, Daylight View: OFF, Auto Power Save: OFF]				4,400 lm [input signal: PC, lamp power: Normal, picture mode: Dynamic, Daylight View: OFF, Auto Power Save: OFF]		5,500 lm [input signal: PC, lamp power: Normal, picture mode: Dynamic, Daylight View: OFF, Auto Power Save: OFF]							
Center-to-corner uniformity*3		85 %													
Contrast*3		16,000:1 [all white/all black] [input signal: PC, lamp power: Normal, picture mode: Dynamic, Iris: On, Daylight View: OFF, Auto Power Save: OFF]				10,000:1 [full on/off] [input signal: PC, lamp power: Normal, picture mode: Dynamic, Iris: On, Daylight View: OFF, Auto Power Save: OFF]		16,000:1 [all white/all black] [input signal: PC, lamp power: Normal, picture mode: Dynamic, Iris: On, Daylight View: OFF, Auto Power Save: OFF]							
Resolution		1920 × 1200 pixels						1280 × 800 pixels [Input signals that exceed this resolution will be converted to 1280 × 800 pixels.]				1024 × 768 pixels [Input signals that exceed this resolution will be converted to 1024 × 768 pixels.]			
Scanning frequency	HDMI	480/60i*, 576/50i*, 480/60p, 576/50p, 720/60p, 720/50p, 1080/24p, 1080/24sF, 1080/25p, 1080/30p, 1080/60p, 1080/50p, 1080/60i, 1080/50i, Displayable resolution: 640 × 400 to 1920 × 1200 [non-interlace], Dot clock frequency: 25 MHz to 162 MHz													
	RGB (analog)	Displayable resolution: 640 × 400 to 1920 × 1200 [non-interlace], fh: 15 kHz–91 kHz, fv: 24 Hz–100 Hz, dot clock: 162 MHz or lower													
	YPbPr (YCbCr)	fh: 15.73 kHz, fv: 59.94 Hz [480/60i], fh: 15.63 kHz, fv: 50 Hz [576/50i], fh: 31.47 kHz, fv: 59.94 Hz [480/60p], fh: 31.25 kHz, fv: 50 Hz [576/50p], fh: 45.00 kHz, fv: 60 Hz [720/60p], fh: 37.50 kHz, fv: 50 Hz [720/50p], fh: 27.00 kHz, fv: 24 Hz [1080/24p], fh: 27.00 kHz, fv: 48 Hz [1080/24sF], fh: 28.13 kHz, fv: 25 Hz [1080/25p], fh: 33.75 kHz, fv: 30 Hz [1080/30p], fh: 67.50 kHz, fv: 60 Hz [1080/60p], fh: 56.25 kHz, fv: 50 Hz [1080/50p], fh: 33.75 kHz, fv: 60 Hz [1080/60i], fh: 28.13 kHz, fv: 50 Hz [1080/50i]*, HD/SYNC and VD terminals do not support 3 value SYNC.													
	Video	fh: 15.73 kHz/15.63 kHz, fv: 59.94 Hz/50 Hz [NTSC/NTSC4.43/PAL/PAL60/PAL-N/PAL-M/SECAM]													
Optical axis shift		Vertical 0 to +44 % from center of screen (manual), U/D ratio on top end: 17:1										Vertical 0 to +40 % from center of screen (manual), U/D ratio on top end: 9:1			
Keystone correction range		Vertical: maximum ±25 ° [auto/manual, input: WUXGA], Horizontal: maximum ±30 ° [manual, input: WUXGA]						Vertical: maximum ±35 ° [auto/manual, input: WXGA], Horizontal: maximum ±35 ° [manual, input: WXGA], Up to a total of ±55 ° during simultaneous horizontal and vertical correction.				Vertical: maximum ±35 ° [auto/manual, input: XGA], Horizontal: maximum ±35 ° [manual, input: XGA], Up to a total of ±55 ° during simultaneous horizontal and vertical correction.			
Installation		Front ceiling/Front desk/Rear ceiling/Rear desk													
Terminals	HDMI IN	HDMI 19-pin × 2 [Deep Color, compatible with HDCP], audio signal: Linear PCM [sampling frequency: 48 kHz/44.1 kHz/32 kHz]													
	COMPUTER IN 1	D-sub 15-pin [female] x 1 [RGB/Y • Pb [Cb] • Pr [Cr]]													
	COMPUTER IN 2/MONITOR OUT	D-sub 15-pin [female] x 1 [RGB/Y • Pb [Cb] • Pr [Cr] (input/output switching)]													
	VIDEO IN	Pin jack x 1													
	AUDIO IN 1	M3 stereo mini jack x 1													
	AUDIO IN 2	M3 stereo mini jack x 1				M3 stereo mini jack x 1, compatible with MIC input		M3 stereo mini jack x 1							
	AUDIO IN 3	Pin jack [L/R] x 1													
	AUDIO OUT	M3 stereo mini jack x 1 [monitor out: variable]													
	SERIAL IN	D-sub 9-pin [female] x 1 for external control [RS-232C compliant]													
	USB A	Type A Memory Viewer/Pairing function x 1	Type A for DC output x 1 (for power supply, DC 5 V, max. 2 A)*5		—		Type A Memory Viewer/Pairing function x 1		Type A for DC output x 1 (for power supply, DC 5 V, max. 2 A)*5		Type A Memory Viewer/Pairing function x 1		Type A for DC output x 1 (for power supply, DC 5 V, max. 2 A)*5		
USB B	Type B for USB Display x 1	—		—		Type B for USB Display x 1		—		Type B for USB Display x 1		—			
LAN/DIGITAL LINK		RJ-45 × 1 for network connection, DIGITAL LINK, 100Base-TX, compatible with PjLink™, HDCP compatible, Deep Color compatible				—		RJ-45 × 1 for network connection, DIGITAL LINK, 100Base-TX, compatible with PjLink™, HDCP compatible, Deep Color compatible				RJ-45 × 1 for network connection, DIGITAL LINK, 100Base-TX, compatible with PjLink™, HDCP compatible, Deep Color compatible			
LAN		—		RJ-45 × 1 for network connection, 10Base-1/100Base-TX, compatible with PjLink™		—		RJ-45 × 1 for network connection, 10Base-1/100Base-TX, compatible with PjLink™		—		RJ-45 × 1 for network connection, 10Base-1/100Base-TX, compatible with PjLink™			
Built-in speaker		4,0 cm [1 1/16"] round shape × 1, output power: 10 W [monaural]													
Operating noise*3		37 dB [lamp power: Normal], 35 dB [lamp power: ECO1], 29 dB [lamp power: ECO2]				37 dB [lamp power: Normal], 29 dB [lamp power: ECO]		37 dB [lamp power: Normal], 35 dB [lamp power: ECO1], 29 dB [lamp power: ECO2]							
Cabinet materials		Molded plastic													
Dimensions (W × H × D)		389 × 125*7 × 332 mm [15-5/16" × 4-29/32"*7 × 13-1/16"]													
Weight*6		Approximately 4.9 kg [10.8 lbs]		Approximately 4.8 kg [10.6 lbs]				Approximately 4.9 kg [10.8 lbs]		Approximately 4.8 kg [10.6 lbs]		Approximately 4.9 kg [10.8 lbs]		Approximately 4.8 kg [10.6 lbs]	
Operating environment		Operating temperature: 0–40 °C [32–104 °F]*8 [altitude: less than 1,200 m [3,937 ft]], 0–30 °C [32–86 °F] [altitude: 1,200–2,700 m [3,937 ft–8,858 ft]], Operating humidity: 20–80 % [no condensation]													
Supplied accessories		Wireless remote control unit × 1, Power cord with power cord holder x 1 [x 2 for UK and Asia], Software CD-ROM × 1 [Operating instructions, Multi Monitoring and Control Software, Logo Transfer Software, Wireless Manager ME software [PT-VZ585N/VW545N/VX615N only]], Batteries [AAA type × 2], RGB cable x 1, Lens cap x 1													
*1 PT-VZ470 is not available in Taiwan. *2 When the Standby Mode is set to ECO, network functions such as Power On via LAN will not operate. Also, only certain commands can be received for external control using the serial terminal. *3 Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards. *4 Pixel-repetition signal [dot clock frequency: 27.0 MHz] only. *5 No output when projector is on standby. *6 Average value. May differ depending on the actual unit. *7 With legs at shortest position. *8 When operating temperature is between 35 °C [95 °F] and 40 °C [104 °F], lamp power automatically switches to ECO in order to protect the projector.															
Built-in wireless LAN (PT-VZ585N/VW545N/VX615N)		Standard: 2.4 GHz: IEEE802.11b/g/n, 5.0 GHz: IEEE802.11a/n Infrastructure Mode: WPA-PSK [TKIP/AES], WPA2-PSK [TKIP/AES], 128-bit/64-bit WEP, WPA-EAP/WPA2-EAP [PEAP [MS-CHAPv2/GTC]/EAP-FAST [MS-CHAPv2/GTC]/EAP-TTLS [MD5/MS-CHAPv2], 128-bit/64-bit], Miracast													

Panasonic®

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. The projection distances and throw ratios given in this leaflet are intended only as guidelines. For more detailed information, please consult the dealer from whom you are purchasing the product. Windows, Windows Vista and PowerPoint are trademarks of Microsoft Corporation in the United States and other countries. Android is a registered trademark or trademark of Google Inc. Mac, iPad, iPhone, iPod touch and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. PjLink™ is a registered trademark or pending trademark in Japan, the United States, and other countries and regions. QR Code is a registered trademark of Denso Wave Inc. Crestron Connected™ is a trademark of Crestron Electronics, Inc. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Wi-Fi® and Miracast are trademarks or registered trademarks of Wi-Fi Alliance. HDBaseT™ is a trademark of the HDBaseT Alliance. All other trademarks are the property of their respective trademark owners. Projection images simulated. 36 USC 220506 © 2017 Panasonic Corporation. All rights reserved.



For more information about Panasonic projectors, please visit:
 Projector Global Website – panasonic.net/cns/projector
 Facebook – www.facebook.com/panasonicprojector
 YouTube – www.youtube.com/user/PanasonicProjector

All information included here is valid as of June 2017.

PT-VZ580series_G1 Printed in Japan.