

คีย์ คุณสมบัติ


- 25,000:1 contrast ratio
- SuperColor™ technology
- 5 color modes
- · Auto power off
- Vertical keystone



สินค้า **รายละเอียด**

The ViewSonic SP6 offers impressive visual performance in small business meeting rooms and classrooms. With higher brightness and longer lamp life, the projector is guaranteed to reproduce the finest of details in any environment for much longer. ViewSonic exclusive SuperColor™ technology offers a wider range of displayable color ensuring true-to-life color accuracy in both bright and dark environments without sacrificing image quality.



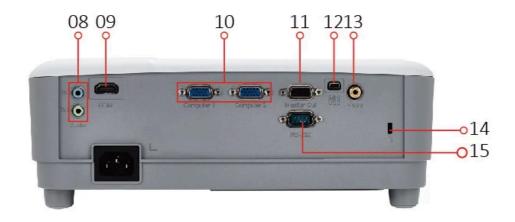

SPECIFICATION 1. Keypa	ad 8. Audio in/	ou ©THERS 15. RS232	
Native Resolution:	1024x768	Power Supply Voltage:	100-240V+/- 10%, 50/60Hz AC
Brightness:	4,800 ANSI Lumens		Normal: 260W
Contrast Ratio with SuperEco mode:	25,000:1	Power Consumption:	Standby: <0.5W
Display Color:	1.07 Billion Colors	Operating Temperature:	0~40℃
Light Source:	Lamp	Carton:	Brown
Light Source Life (hours) with	5000	Net Weight:	2.2kg
Normal Mode: Light Source Life (hours) with	15000	/ Gross Weight: Dimensions (WxDxH)	3.24Kg 294x218x110mm
SuperEco Mode:		w/adjustment foot:	
Lamp Watt:	190W	Packing Dimensions:	365x300x188mm
Lens:	F=2.56-2.68, f=22-24.1 mm	OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T- Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages English, S-Chinese, T- Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Total 15 languages
Projection Offset:	120%+/-5%		
Throw Ratio:	1.96~2.15		
Optical Zoom:	1.1x		
Digital Zoom:	0.8x-2.0x		
Image size:	30" - 300"		
Throw Distance:	1.19m-13.11m(100" @3.98m)	User Guide Language:	
Keystone:	±40° (Vertical)		
Audible Noise (Normal):	31dB		
Audible Noise (Eco):	27dB	STANDARD ACCESSORY	randon, rotal to languages
Input Lag:	16ms	Power Cord:	1
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)	VGA cable:	1
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	Remote Control: QSG & CD:	1 QSG: 1 / CD: NA
Video Compatibility:	NTSC, PAL, SECAM	OPTIONAL ACCESSORY	
Horizontal Frequency:	15K~102KHz	Lamp/Light Source:	RLC-108
Vertical Scan Rate:	23~120Hz	Air Filter:	RSPL
INPUT		Wall/Ceiling Mount:	PJ-WMK-007
Computer in (share with component):	2	Carry Bag:	PJ-CASE-008
Composite:	1		
HDMI:	1 (HDMI 1.4/ HDCP 1.4)		
Audio-in (3.5mm):	1		
OUTPUT			
Monitor out:	1		
Audio out (3.5mm):	1		
Speaker:	2W		
CONTROL			
RS232:	1		
USB type mini B (Services):	1		
, , , , , , , , , , , , , , , , , , ,			